


Canford Scriptlight M6 Mounting Positions

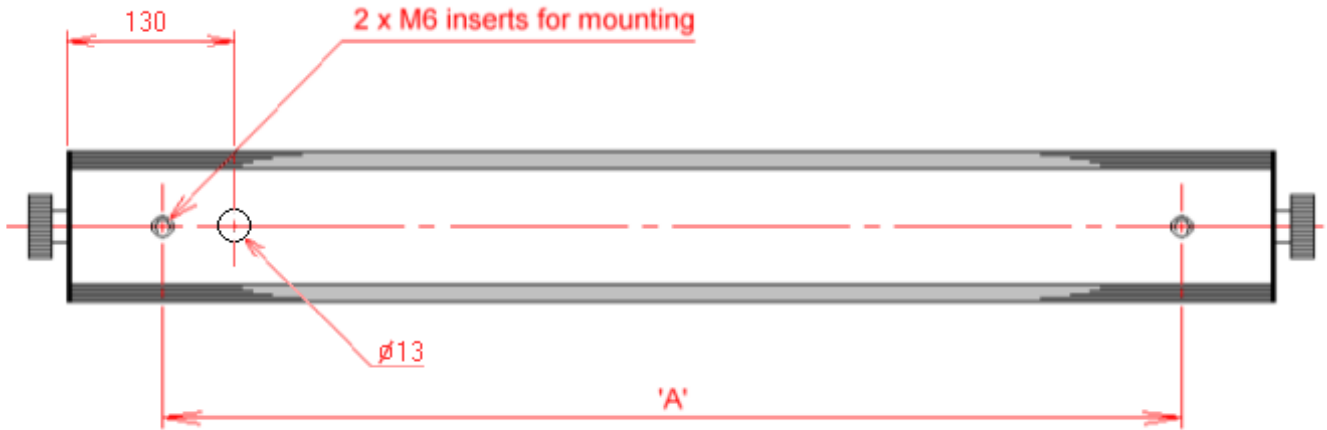

Tapped mounting inserts equi-distant about centre of scriptlight length

Scriptlight Tube Length	DIM 'A'
600mm	627mm
900mm	933mm
1200mm	1236mm

As the mounting of scriptlights is wide and varied Canford do not offer any mounting kits.

The M6 threaded inserts can be used with M6 fixings for surface or suspended mounting depending on the precise nature of the install. The base/back of the script light may be drilled for other fixing arrangements if required. Care must be taken not to damage components mounted inside, remove script light tube prior to modification.

A 13mm hole is provided complete with a 9mm cable grommet for mains cable access.